

# Hall Current Sensor HIEM-NC-100LA

## Electrical data

TYPE		NC-25LA	NC-50LA	NC-75LA	NC-100LA
parameter	sign				
Primary nominal r.m.s. current	$I_{PN}$	25A	50A	75A	100A
Primary current measuring range	$I_P$	0~ ±38A	0~ ±75A	0~ ±105A	0~ ±150A
Secondary nominal RMS current	$I_{SN}$	25mA	50mA		
Supply voltage	$V_C$	±15V DC ±5%			
Zero offset current @ $I_{PN}=0, T_A=25^{\circ}C$	$I_0$	±0.2mA MAX		±0.15mA MAX	
Thermal drift of offset current @ $I_{PN}=0$	$I_{0T}$	±0.1mA TYPE ±0.5mA MAX		±0.1mA TYPE ±0.25mA MAX	
Linearity of $V_{SN}$ at $I_{PN}=F.S$	$\epsilon_L$	within ±0.15% of $I_{PN}$ at $I_{PN}=F.S$			
Response time	$T_r$	<1μs TYPE			
R.m.s. voltage for AC isolation test	$V_d$	2.5KV/50Hz or 60Hz/1min			
Ambient operating temperature	$T_a$	-10~+80° C E:-40~+85° C			
Ambient storage temperature	$T_s$	-15~+85° C E:-45~+105° C			




## Features

1. Closed loop (compensated) multirange current sensor using the Hall effect
2. High accuracy
3. Very low temperature drift
4. Wide frequency bandwidth
5. High immunity to external interference

## Applications

1. AC variable speed drives and serve motor drives
2. Uninterruptible Power Supplies (UPS)
3. Battery supplied applications
4. Power supplies for welding applications.

## Dimension(mm)

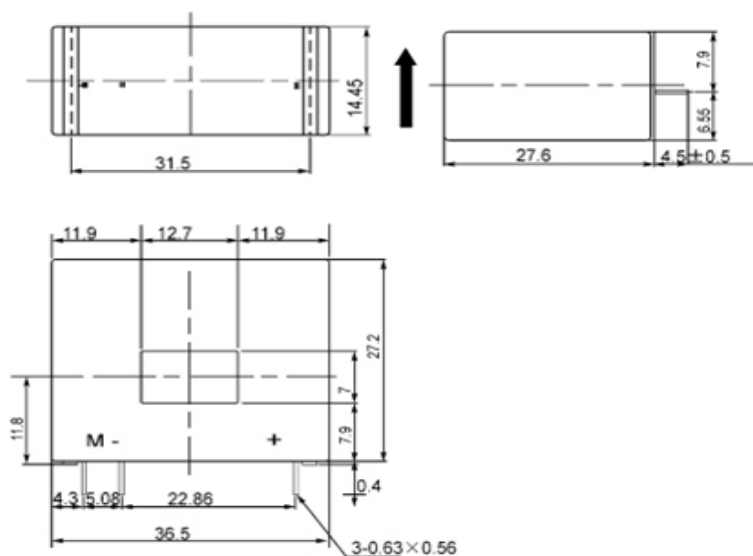

## Connection diagram

